



TECHNICAL SPECIFICATIONS			T1800 H	TECNA®
Breaker code	Rev.	Year		
T15000	2.0	2016		

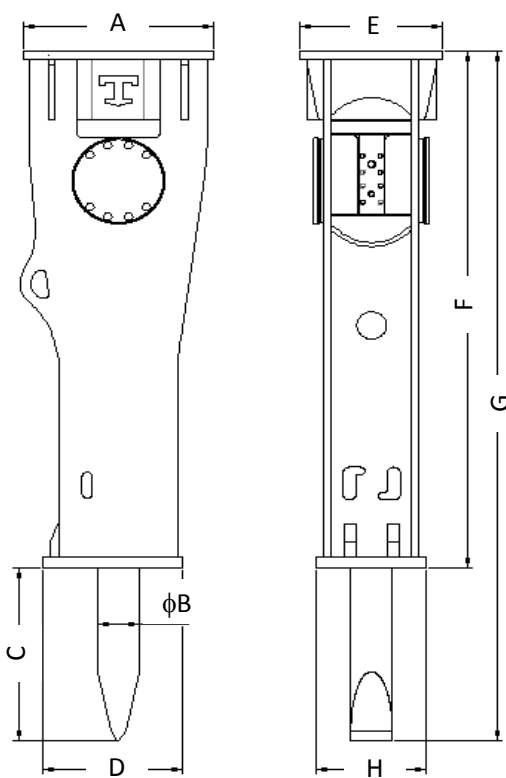

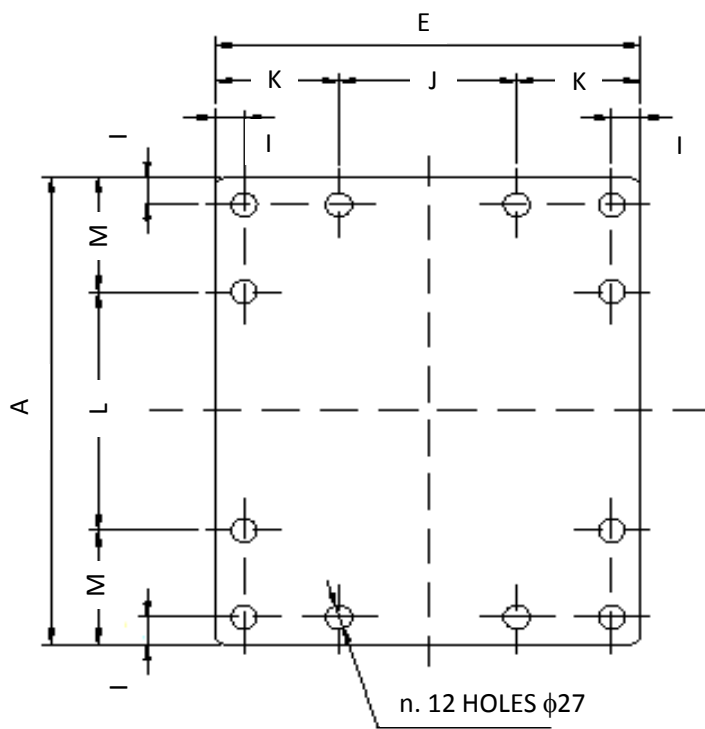

n. 12 HOLES ϕ 27

Minimal base thickness: 35 mm / 1,4 in

	mm	in		mm	in
A	640	25,2	H	372	14,6
ϕ B	140	5,5	I	30	1,2
C	634	25,0	J	120	4,7
D	470	18,5	K	180	7,1
E	480	18,9	L	320	12,6
F	1890	74,4	M	160	6,3
G	2524	99,4			

I	GB	E	D	METRIC UNIT / IMPERIAL UNIT			
PESO ESCAVATORE	SUITABLE EXCAVATOR	PESO EXCAVADORA	GEEIGNET FÜR TRÄGERGERÄT	21 ÷ 28	Ton	46297 ÷ 61729	lbs
PESO MEDIO OPERATIVO	OPERATING WEIGHT	PESO MEDIO OPERATIVO	ARBEITSGEWICHT DES HAMMERS	1800	Kg	3968,3	lbs
DIAMETRO UTENSILE	TOOL DIAMETER	DIAMETRO PICA	MEISSEL DURCHMESSER	140	mm	5,51	in
PORTATA	OIL SUPPLY	CAUDAL	ÖLBEDARF	180 ÷ 210	l/min	48 ÷ 55	GPM
PRESSIONE DI LAVORO	BREAKER WORKING PRESSURE	PRESSION EN EL MARTILLO	ARBEITSSOLDRUCK IM HYDRAULIKHAMMER	130 ÷ 160	bar	1885 ÷ 2321	PSI
PRESSIONE REGOLATA ALL'ESCAVATORE	RELIEF PRESSURE SETTING	PRESSION EN LA EXCAVADORA	ARBEITSSOLDRUCK IM TRÄGERGERÄT	200	bar	2901	PSI
CONTROPRESSIONE MAX	MAX BACK PRESSURE	CONTRAPRESSION MAX	MAX STAUDRUCK	15	bar	218	PSI
POTENZA INGRESSO (MAX)	INPUT POWER (MAX)	POTENCIA DE ENTRADA (MAX)	EINGANGS LEISTUNG (MAX)	50	Kw	67,0	HP
CLASSE DI ENERGIA D'URTO	IMPACT ENERGY CLASS	ENERGIA DE IMPACTO CLASE	KLASSE SCHLAGENERGIE	4500	J	3321	Ft/lbs
NUMERO DI COLPI AL MINUTO	IMPACT RATE	GOLPES MINUTO	SCHLAGZAHL PRO MINUTE	450 ÷ 600	BPM	450 ÷ 600	BPM
TEMPERATURA MASSIMA OLIO IDRAULICO	MAX TEMPERATURE HYDRAULIC OIL	TEMP. MAX DE ACEITE HIDRAULICO	MAX ÖLTEMPERATUR	80	°C	176	°F
TUBAZIONE IMPIANTO MANDATA (Ø min.)	RECOMMENDED INLET LINE SIZE (Ø min.)	TUBERIA INSTALLACION PRESION (Ø min.)	EMPFOHLENE VORLAUF LEITUNG (Ø min.)	26	mm	1,02	in
TUBAZIONE IMPIANTO RITORNO (Ø min.)	RECOMMENDED RETURN LINE SIZE (Ø min.)	TUBERIA INSTALLACION RITORNO (Ø min.)	EMPFOHLENE RUECKLAUF LEITUNG (Ø min.)	32	mm	1,26	in
LUNGHEZZA CONSIGLIATA TUBI FLESSIBILI	SUGGESTED MIN FLEX HOSES LENGTH	LONGITUD MAXIMA LATIGUILLO	LÄNGE HAMMER ANSCHLUSS SCHLAUCH	2400	mm	94,5	in
ATTACCO INGRESSO DEMOLITORE	HOSE CONNECTION AT THE BREAKER'S INLET LINE	RACOR PRESSION MARTILLO	HAMMER SCHLAUCH RÜCKLAUF	1" G		1" G	
ATTACCO USCITA DEMOLITORE	HOSE CONNECTION AT THE BREAKER'S RETURN LINE	RACOR RITORNO MARTILLO	HAMMER SCHLAUCH VORLAUF	1"1/4 G		1"1/4 G	