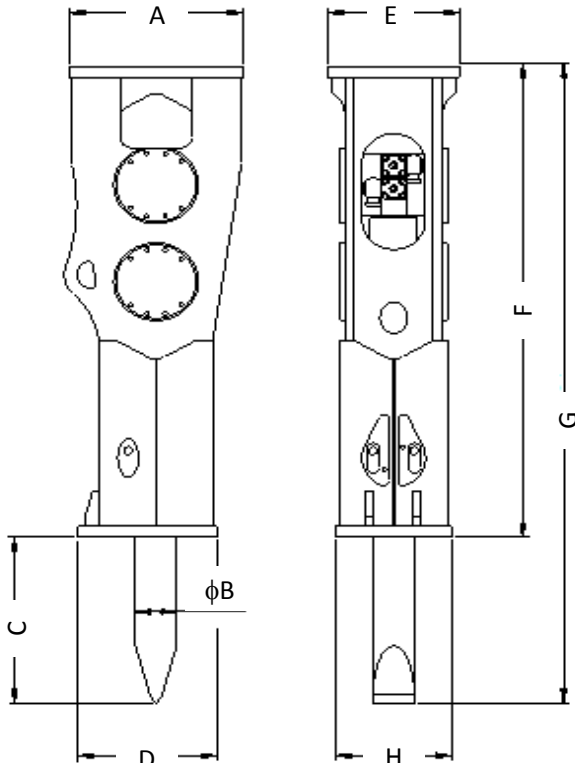
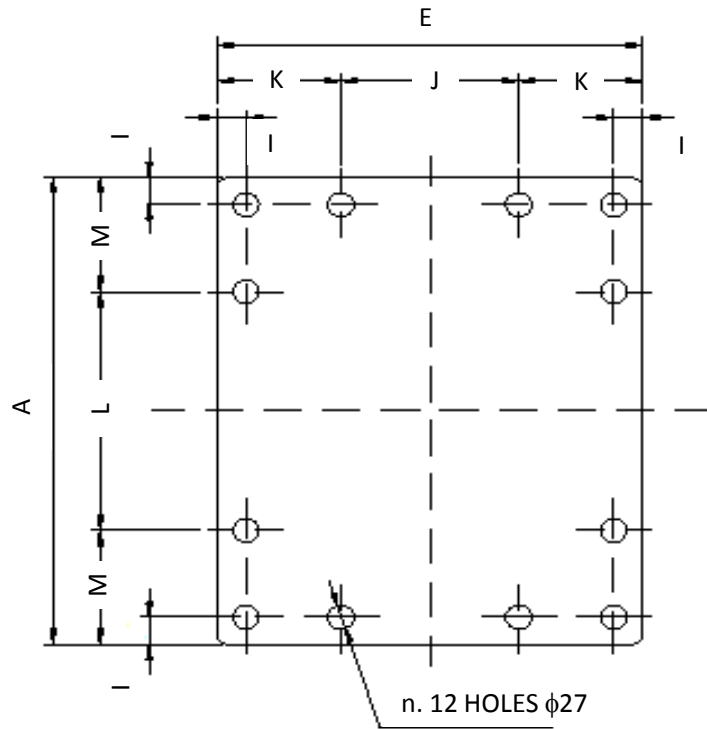


TECHNICAL SPECIFICATIONS			T2400 H		TECNA®	
Breaker code	Rev.	Year				
T24000	2.0	2016				
			 n. 12 HOLES φ27 Minimal base thickness: 45 mm / 1,8 in			
	mm	in		mm	in	
A	660	26,0	H	440	17,3	
φ B	150	5,9	I	40	1,6	
C	670	26,4	J	120	4,7	
D	526	20,7	K	190	7,5	
E	500	19,7	L	320	12,6	
F	1948	76,7	M	170	6,7	
G	2618	103,1				
I	GB	E	D	METRIC UNIT / IMPERIAL UNIT		
PESO ESCAVATORE	SUITABLE EXCAVATOR	PESO EXCAVADORA	GEEIGNET FÜR TRÄGERGERÄT	25 ÷ 36	Ton	55116 ÷ 79366 lbs
PESO MEDIO OPERATIVO	OPERATING WEIGHT	PESO MEDIO OPERATIVO	ARBEITSGEWICHT DES HAMMERS	2400	Kg	5291,1 lbs
DIAMETRO UTENSILE	TOOL DIAMETER	DIAMETRO PICA	MEISSEL DURCHMESSER	150	mm	5,91 in
PORTATA	OIL SUPPLY	CAUDAL	ÖLBEDARF	210 ÷ 260	l/min	55 ÷ 69 GPM
PRESSIONE DI LAVORO	BREAKER WORKING PRESSURE	PRESSION EN EL MARTILLO	ARBEITSSOLDRUCK IM HYDRAULIKHAMMER	130 ÷ 160	bar	1885 ÷ 2321 PSI
PRESSIONE REGOLATA ALL'ESCAVATORE	RELIEF PRESSURE SETTING	PRESSION EN LA EXCAVADORA	ARBEITSSOLDRUCK IM TRÄGERGERÄT	200	bar	2901 PSI
CONTROPRESSIONE MAX	MAX BACK PRESSURE	CONTRAPRESSION MAX	MAX STAUDRUCK	15	bar	218 PSI
POTENZA INGRESSO (MAX)	INPUT POWER (MAX)	POTENCIA DE ENTRADA (MAX)	EINGANGS LEISTUNG (MAX)	66	Kw	88,5 HP
CLASSE DI ENERGIA D'URTO	IMPACT ENERGY CLASS	ENERGIA DE IMPACTO CLASE	KLASSE SCHLAGENERGIE	6480	J	4782 Ft/lbs
NUMERO DI COLPI AL MINUTO	IMPACT RATE	GOLPES MINUTO	SCHLAGZAHL PRO MINUTE	400 ÷ 550	BPM	400 ÷ 550 BPM
TEMPERATURA MASSIMA OLIO IDRAULICO	MAX TEMPERATURE HYDRAULIC OIL	TEMP. MAX DE ACEITE HIDRAULICO	MAX ÖLTEMPERATUR	80	°C	176 °F
TUBAZIONE IMPIANTO MANDATA (Ø min.)	RECOMMENDED INLET LINE SIZE (Ø min.)	TUBERIA INSTALLACION PRESION (Ø min.)	EMPFOHLENE VORLAUF LEITUNG (Ø min.)	28	mm	1,10 in
TUBAZIONE IMPIANTO RITORNO (Ø min.)	REOMMENDED RETURN LINE SIZE (Ø min.)	TUBERIA INSTALLACION RITORNO (Ø min.)	EMPFOHLENE RUECKLAUF LEITUNG (Ø min.)	36	mm	1,42 in
LUNGHEZZA CONSIGLIATA TUBI FLESSIBILI	SUGGESTED MIN FLEX HOSES LENGTH	LONGITUD MAXIMA LATIGUILLO	LÄNGE HAMMER ANSCHLUSS SCHLAUCH	2400	mm	94,5 in
ATTACCO INGRESSO DEMOLITORE	HOSE CONNECTION AT THE BREAKER'S RETURN LINE	RACOR PRESSION MARTILLO	HAMMER SCHLAUCH RÜCKLAUF	1" G		1" G
ATTACCO USCITA DEMOLITORE	HOSE CONNECTION AT THE BREAKER'S INLET LINE	RACOR RITORNO MARTILLO	HAMMER SCHLAUCH VORLAUF	1"1/4 G		1"1/4 G